


ARF-UP-SA (RF Universal Auto Press)

DUT or PCB use the same tool

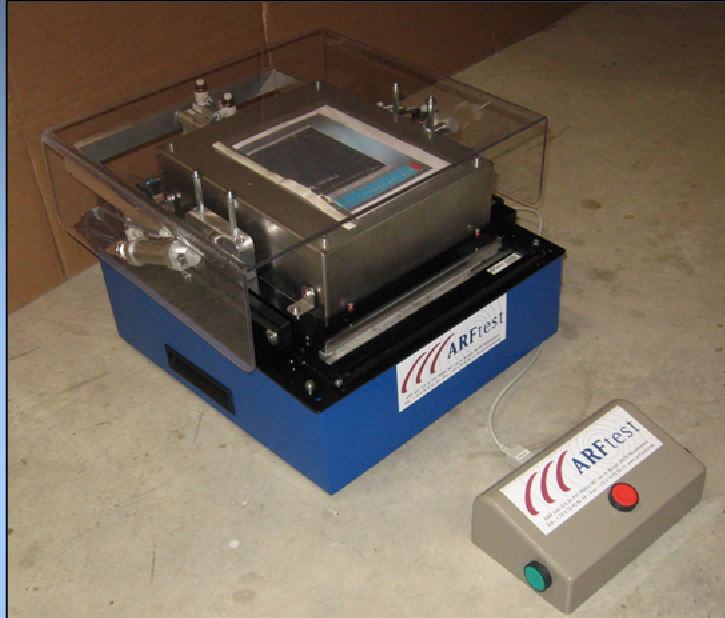

DUT or PCB use the same tool

Design for high throughput
Needles bed
Final product
Radio communication product

Characteristics
Three size area
with shielding :

ARF-UP02-SA =300*250
ARF-UP03-SA =300*450

shielding box
100 Hz-8.5 GHz Better than 80 dB
Output Rf connector :
Two N connectors, I/O Filter DB9

Fitted for use with

PCB
Key
PDA
Lan 802.11
Head set...
Cell phone

ARF-UP-SA (RF Universal Auto Press)

DUT or PCB use the same tool

Full automatic Closing and locking by cylinder locking , PLC checking included, Push button box

Fermeture / verrouillage ou ouverture de la boîte par vérin, automate de de contrôle intégré

Boitier de commande




Change application easier

Changement rapide d'applicatif



Custom panel
Arrière "custom"
Or RF panel

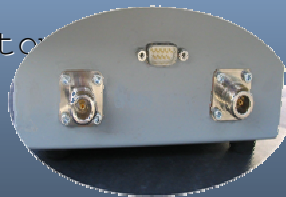

ARF-UP-SA (RF Universal Auto Press)

Insulation with Dipole > 80db

